




HIKVISION®

DS-K1T320MFX **Face Recognition Terminal**

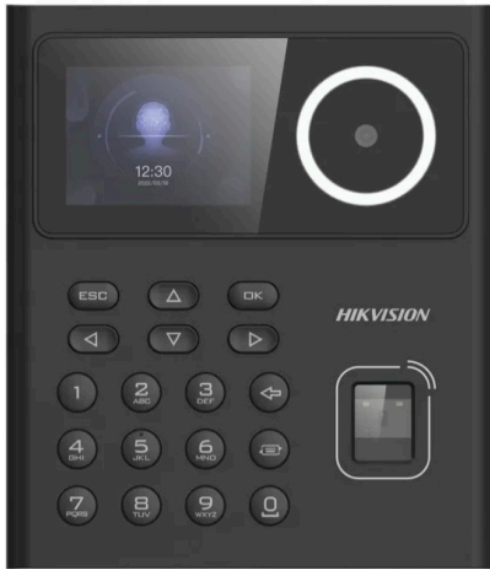

-
-
- Supports M1 card
- Max. 500 faces, 1,000 cards, 1,000 fingerprints and 100,000 events
- Face recognition duration < 0.2 s/User
- Supports ISAPI and ISUP 5.0 protocols
- Configuration via the web client

Face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes: face/card/fingerprint/PIN authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.


□ Specification

Display	
Screen size	2.4 inch
	LCD
	1
	2 MP (video stream: 720P)
	HFOV = 43°; VFOV = 25°
	Support
	1 RJ-45, 10/100 M self-adaptive
	1
	1
	1
	1
	1
	1
	M1 card
	Yes
	12 VDC
	≤ 6 W
	-10 °C to 55 °C (14 °F to 131 °F)
	0 to 90% (No condensing)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean, Japanese
	Support

□ Available Model

DS-K1T320MFX

□ Dimension

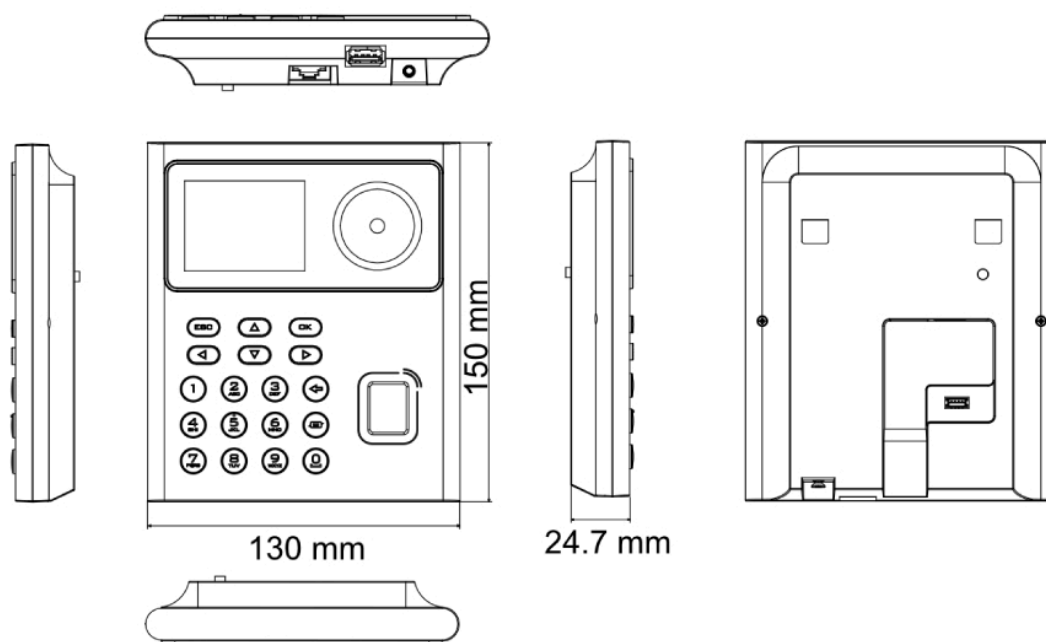

□ Accessory

□ Optional

DS-KAB320-D1 320 Bracket	DS-KAB6-W1 Bracket
	