

MinMoe

Face Recognition Terminals

Touch-free, access is easier than ever

DS-K1T344 Series

-  Aluminum alloy & tempered glass design
-  Alarm in/out for flexible linkage
-  Physical button for video intercom
-  Easy configuration via AP mode / Web / GUI

4.5-inch
touchscreen



POE
SUPPORT

IP65
RATING

▪ Specification


System	
Operating system	Linux
Display	
Screen size	4.5-inch
Resolution	480 × 854
Type	LCD
Operation method	Touchable
Video	
Lens	× 2
Video standard	PAL (Default) and NTSC
Network	
Wired network	10/100 Mbps self adaptive
Wi-Fi	Not support
Interface	
Alarm input	2
Alarm output	1
PoE	IEEE802.3at, standard PoE
Network interface	1
RS-485	1
Wiegand	1, supports Wiegand input, single direction
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
USB	1
Capacity	
User capacity	3000
Card capacity	3000
Face capacity	3000
Event capacity	150000
Authentication	
Card type	M1 card
Card reading frequency	13.56 MHz
Face recognition duration	< 0.2 s
Face recognition accuracy rate	> 99%
Face recognition distance	0.3 to 1.5 m
General	
Button	1 physical call button
Power supply	12 VDC, 1 A, standard PoE
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	10 to 90% (No condensing)
Dimensions	165.2 mm × 75.7 mm × 25 mm (6.5" × 2.98" × 0.98")
Installation	Wall mounting
Protective level	IP65

Weight	Gross weight: 0.60 kg (1.33 lbs) Net weight: 0.30 kg (0.66 lbs)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Turkish, French
Function	
QR code recognition	Support scan QR code via camera
Face anti-spoofing	Support
Two-way audio	Support
Audio prompt	Support

▪ **Available Model**

DS-K1T344MX-E1

▪ **Dimension**

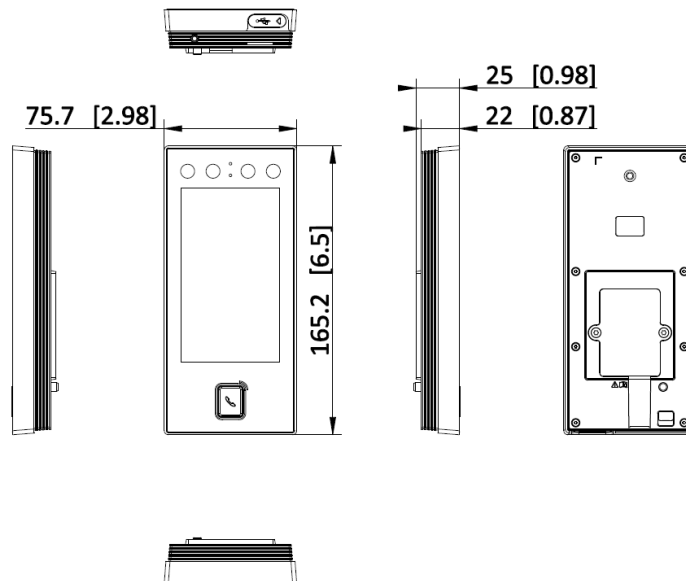

Unit: mm [inch]

SCALE	1:1
-------	-----

▪ **Accessory**

▪ **Optional**